


# Hardware NS

0617

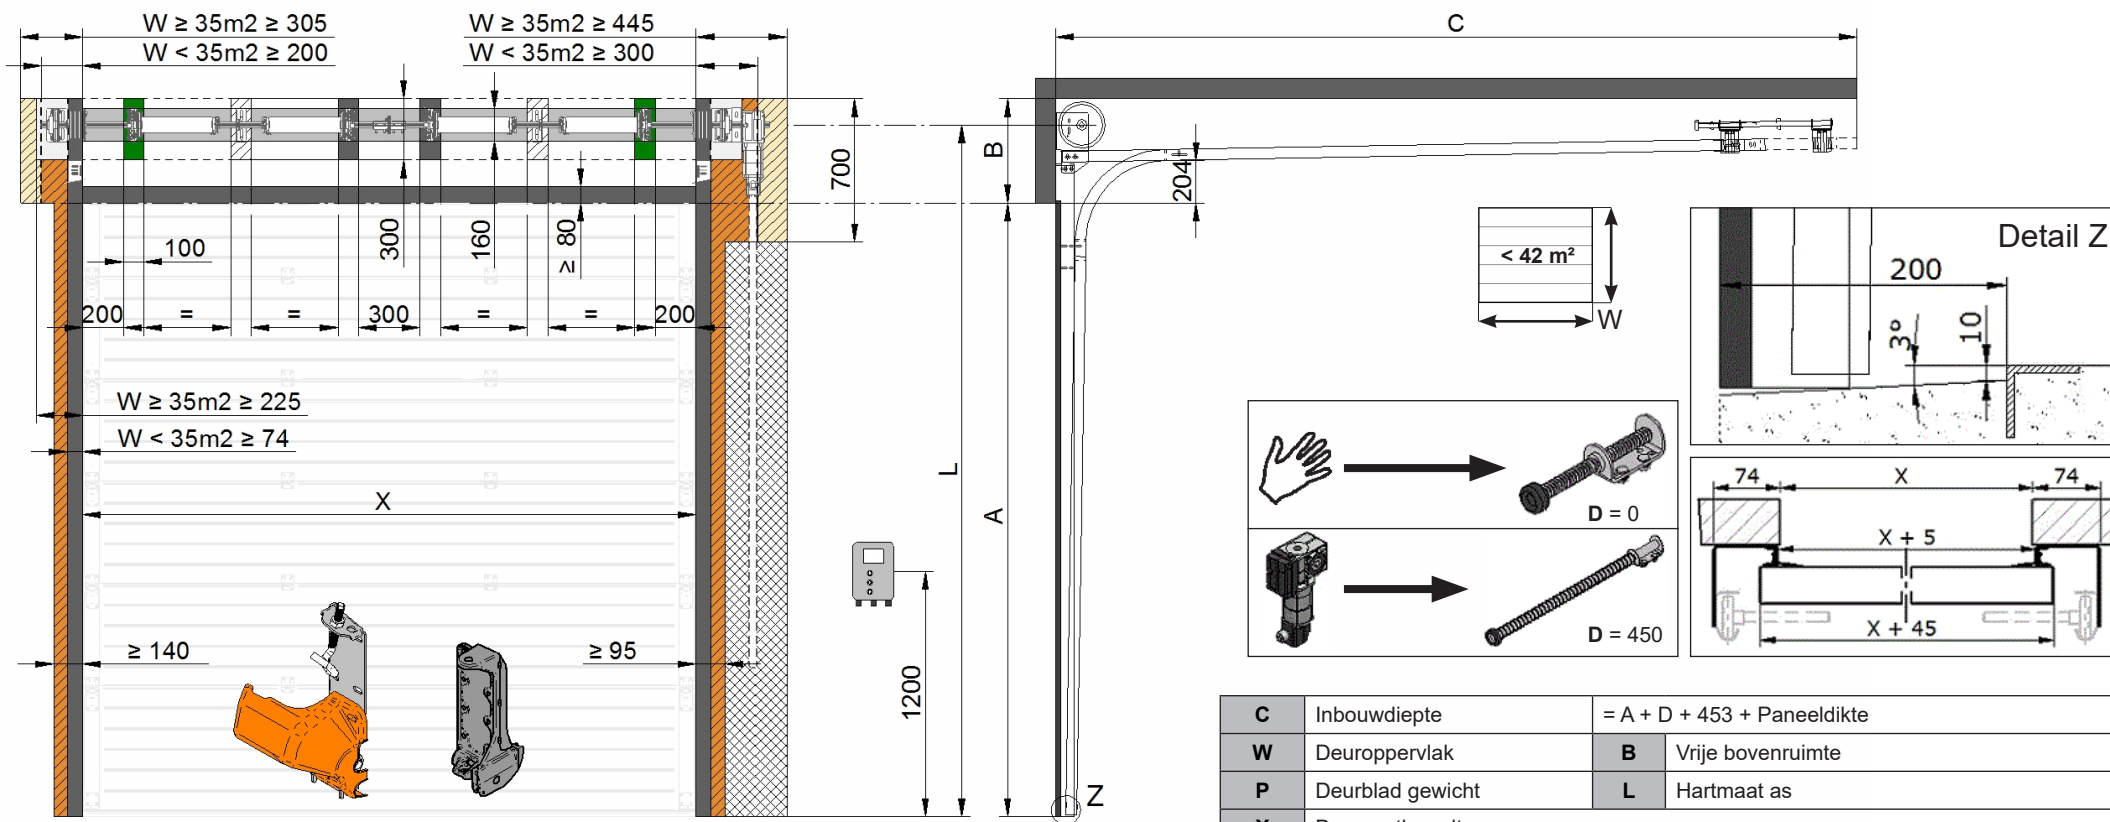

<b>C</b>	Inbouwdiepte	= A + D + 453 + Paneeldikte
<b>W</b>	Deuropervlak	<b>B</b> Vrije bovenruimte
<b>P</b>	Deurblad gewicht	<b>L</b> Hartmaat as
<b>X</b>	Dagmaatbreedte	
<b>A</b>	Dagmaathoogte	

A	Kabeltrommel			P	B		L
	As				Paneeldikte		
					(40-60)	(>60-80)	
mm	Inch	mm	kg	mm	mm	mm	
≤ 3360	3102	1	Ø 121,6	≤ 295	420	460	A + 340
≤ 5500	3103	1	Ø 152,4	≤ 500	420	460	A + 340
≤ 9750	3104	1	Ø 228,6	≤ 500	510	510	A + 380
≤ 9750	3105*	1¼	Ø 228,6	≤ 850	510	510	A + 380

\* 1¼ inch as deur oppervlak ≥ 28 m²

Option ① Option ②

- X > 4750 mm
- + X > 6000 mm
- Vrije ruimte voor motor/ kabelbreuk beveiliging/ waterkering
- Extra vrije ruimte W ≥ 35m²
- Benodigd montagevlak
- Extra montagevlak W ≥ 35m²
- Vrije ruimte voor ketting